


**Fitting for top-running glass doors up to 100 kg (220 lbs.), with running track flush with the ceiling. Optionally with soft and self closing mechanism. Wall or ceiling mounting. Minimal installation height.**

**Product highlights**


-  **Comfort** Accessible opening and soft and self closing at both sides from door widths of 800 mm (2' 7 1/2")
-  **Flexibility** Running tracks for wall and ceiling mounting with integrated clip-on system
-  **Reliability** Performance guarantee: 15 years for private use and 7 years for commercial use on incomparably low opening forces of max. 22 N

**Technical specifications**


-  Max. 100 kg (220 lbs.)
-  Max. 4000 mm (13' 1 15/32")
-  Max. 3000 mm (9' 10 1/8")
-  8-12.7 mm (5/16" to 1/2")

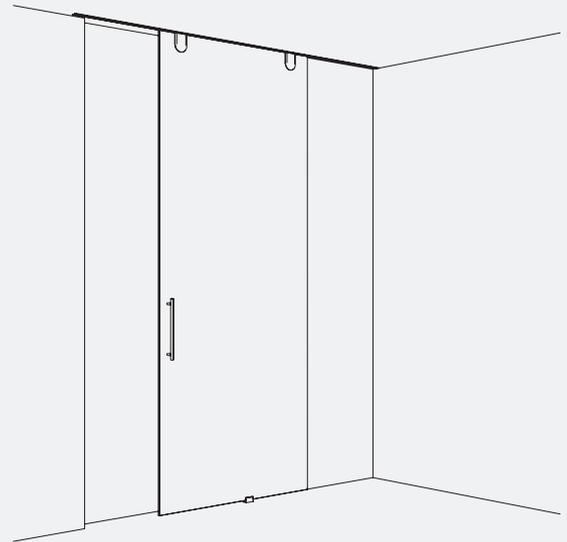

**Installation examples**

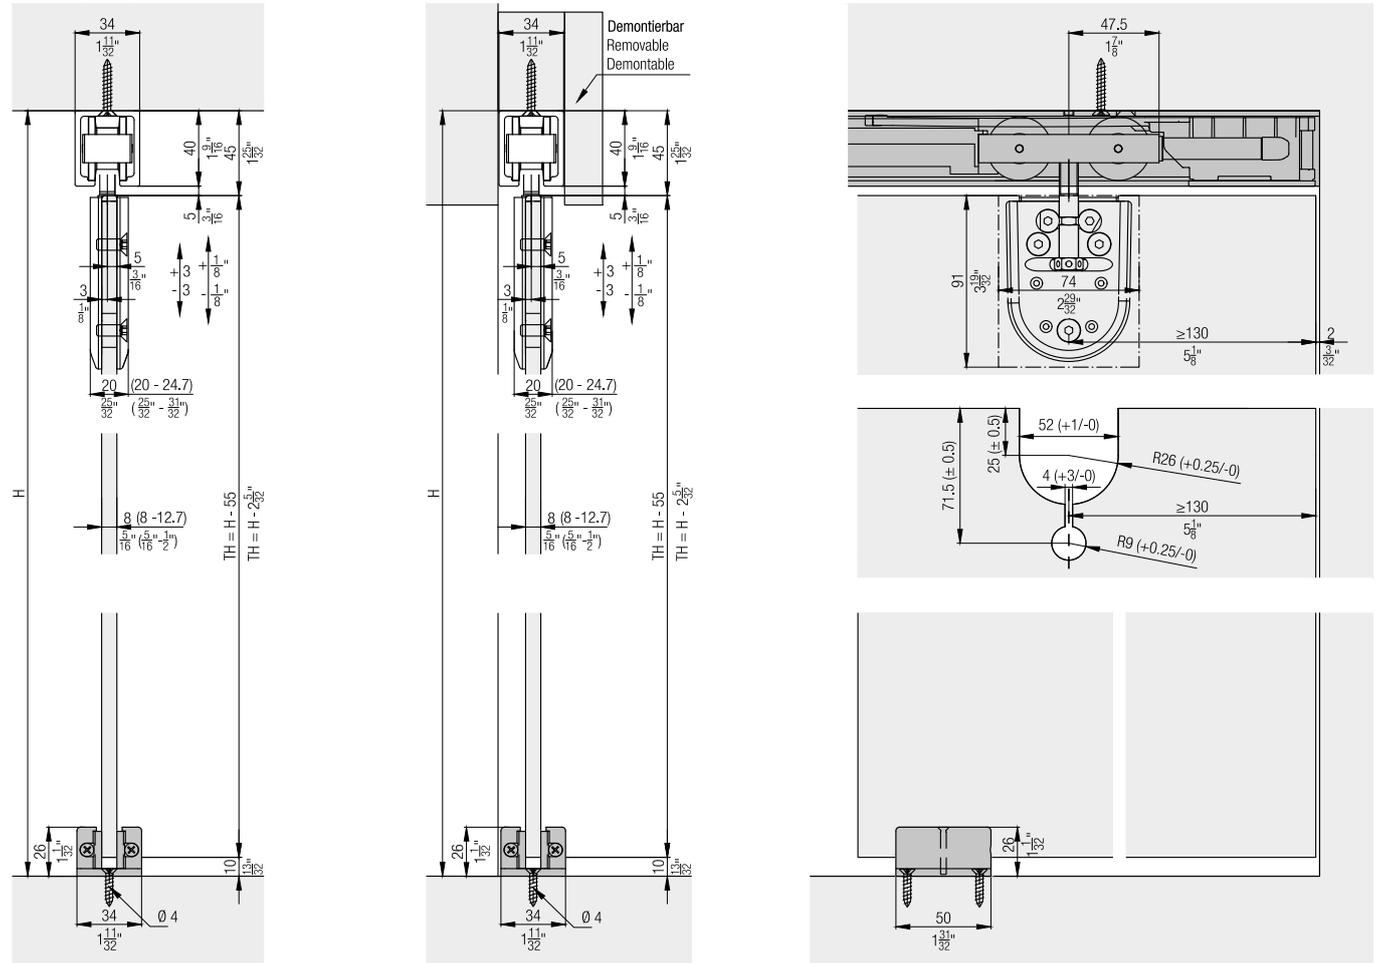

**Further installation examples**

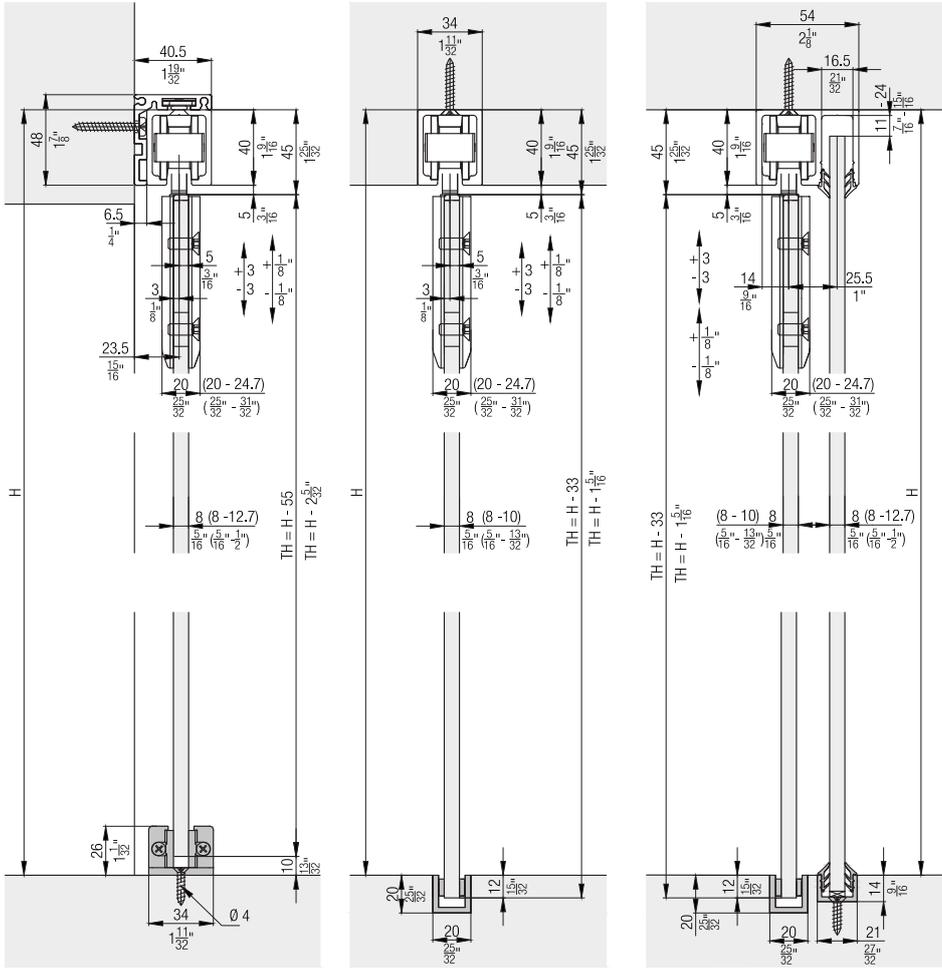

**Set for 1 glass door up to 100 kg (220 lbs.)**

|   | No.   |
|---|-------|
| Hawa Junior 100 GP, for 1 door  | 30720 |
| Hawa Junior 100 GP, for 1 door, with 1 soft closing mechanism SoftMove 100  | 30764 |
| Hawa Junior 100 GP, for 1 door, with 2 soft closing mechanisms SoftMove 100 | 30765 |

**Set consisting of:**

|   |   | 30720 | 30764 | 30765 | No.   |
|---|---|-------|-------|-------|-------|
|    | Running gear, 2-wheeled, M10, ball bearing                                | 2     | 1     |       | 30137 |
|    | SoftStop Hawa Junior 80/100, with adjustable retention spring             | 2     | 1     |       | 27771 |
|   | Suspension bolt M10 and mounting screws                                   | 2     | 2     | 2     | 16018 |
|  | Patch suspension, with glass holder insert, without mounting screws       | 2     | 2     | 2     | 20505 |
|  | Screw-on rubber door stop   | 1     | 1     | 1     | 10629 |
|  | Single use drilling jig   | 1     | 1     | 1     | 20400 |
|  | Vertical adjustment pin   | 1     | 1     | 1     | 16329 |
|  | Soft close SoftMove 100, with running gear, stopper and cover, premounted |       | 1     | 2     | 30509 |

**Bottom guides**

|   | No.  |              |
|---|--|--------------|
|  | Bottom guide, playfree adjustable, glass thickness 8–12.7 mm (5/16" to 1/2"), chrome-plated, mat | 057.3082.071 |
|  | Sliders, for 10 mm glass (13/32"), self-adhesive, 6-piece set                                    | 16193        |
|  | Sliders, for 8 mm (5/16") glass, self-adhesive, 6-piece set                                      | 16192        |


**Cover caps**

|   | No.   |       |
|---|---|-------|
|    | Cover cap, rounded, plastic, chrome-plated, matt, 4-piece set       | 16042 |
|    | Cover cap, rounded, plastic, chromium finish polished, 4-piece set  | 17160 |
|    | Cover cap, rounded, plastic, stainless steel look, 4-piece set      | 16044 |
|    | Cover cap, rounded, plastic, raw, 1 piece                           | 15823 |
|    | Cover cap, square, plastic, chrome-plated, matt, 4-piece set        | 19092 |
|   | Cover cap, square, plastic, stainless steel look, 4-piece set       | 19094 |
|  | Square cover plate, plastic, raw, 1 piece                           | 19000 |
|  | Cover cap to running track, both sides, steel, chrome-plated, matt  | 24956 |
|   | Cover cap to running track, both sides, steel, stainless steel look | 24957 |


**Running tracks**

|   |  | mm<br>(inch)             | No.   |
|---|--|--------------------------|-------|
|  | Running track,<br>aluminum, anodized,<br>pre-drilled                         | 1,400<br>(4' 7 1/8 ")    | 10189 |
|   |  | 1,600<br>(5' 3 ")        | 10190 |
|   |  | 1,800<br>(5' 10 7/8 ")   | 10191 |
|   |  | 2,000<br>(6' 6 3/4 ")    | 10192 |
|   |  | 2,200<br>(7' 2 5/8 ")    | 10193 |
|   |  | 2,500<br>(8' 2 7/16 ")   | 10194 |
|   |  | 3,000<br>(9' 10 1/8 ")   | 18532 |
|   |  | 4,000<br>(13' 1 15/32 ") | 18533 |
|   |  | 6,000<br>(19' 8 7/32 ")  | 10186 |
|   |  | cut to<br>size           | 10188 |
|   | Running track,<br>aluminum, stainless<br>steel look, brushed,<br>pre-drilled | 2,500<br>(8' 2 7/16 ")   | 22048 |
|   |  | 4,000<br>(13' 1 15/32 ") | 20005 |
|   |  | 6,000<br>(19' 8 7/32 ")  | 20004 |
|   |  | cut to<br>size           | 20006 |


**Guide tracks**

|   |  | mm<br>(inch)            | No.   |
|---|--|-------------------------|-------|
|  | Guide track,<br>aluminum, anodized,<br>pre-drilled | 6,000<br>(19' 8 7/32 ") | 14414 |
|   |  | cut to<br>size          | 14415 |


**Running track set with fixed glazing,  
2500 mm (8' 2 7/16"), aluminum, anodized**

|   |   | No.     |
|---|---|---------|
| Set running tracks, with fixed glass,<br>aluminum, anodized, pre-drilled          |   | 20226   |
|   |   | No.     |
| <b>Set consisting of:</b>   |   | 20226   |
|  | Running track, with fixed<br>glass, aluminum, anodized,<br>pre-drilled    | 1 20104 |
|  | Cover profile to running<br>track with fixed glass,<br>aluminum, anodized | 1 19552 |

**Running track set with fixed glazing,  
4000 mm (13' 1 15/32"), aluminum, anodized**

|   |   | No.     |
|---|---|---------|
| Set running tracks, with fixed glass,<br>aluminum, anodized, pre-drilled            |   | 20227   |
|   |   | No.     |
| <b>Set consisting of:</b>   |   | 20227   |
|  | Running track, with fixed<br>glass, aluminum, anodized,<br>pre-drilled    | 1 20105 |
|  | Cover profile to running<br>track with fixed glass,<br>aluminum, anodized | 1 19553 |


**Running track set with fixed glazing,  
6000 mm (19' 8 7/32"), aluminum, anodized**

|   |   | No.     |
|---|---|---------|
| Set running tracks, with fixed glass,<br>aluminum, anodized, pre-drilled            |   | 20228   |
|   |   | No.     |
| <b>Set consisting of:</b>   |   | 20228   |
|  | Running track, with fixed<br>glass, aluminum, anodized,<br>pre-drilled    | 1 20106 |
|  | Cover profile to running<br>track with fixed glass,<br>aluminum, anodized | 1 19562 |

**Running track set with fixed glazing, 6000 mm (19' 8 7/32"), aluminum, stainless steel effect**

|   | No.   |
|---|-------|
| Running track set, with fixed glass, aluminum, stainless steel look, brushed, pre-drilled | 21272 |

**Set consisting of:**

|   | 21272 | No.   |
|---|-------|-------|
|  Running track, with fixed glass, aluminum, stainless steel look, brushed, pre-drilled | 1     | 21278 |
|  Cover profile to running track, with fixed glass, stainless steel effect, brushed     | 1     | 21282 |

**Soft close SoftMove 100**

For soft closing in opening and closing direction order 2 sets.

|  | No.   |
|--|-------|
|  Soft close SoftMove 100, with running gear, stopper and cover, pre-mounted | 30509 |

**Angled profiles for wall mounting**

|   | mm (inch)           | No.   |
|---|---------------------|-------|
|  | 2,500 (8' 2 7/16")  | 24953 |
|   | 6,000 (19' 8 7/32") | 24951 |
|   | cut to size         | 24954 |


**Individual components to angled profile**

|  | No.   |
|--|-------|
|  Assembly set to angled profile, 10-piece set                                   | 17786 |
|  Cover cap to angled profile, steel, chrome-plated, matt, suitable to both side | 24961 |
|  Connecting pins to profiles, 2-piece set                                       | 21347 |

**Hawa Adapto 80 concrete casting system, without fixed glazing**



|   | No.   |
|---|-------|
|  Inset profile for concrete surfaces Hawa Adapto 80, without fixed glass, 2500 mm (8' 2 7/16")   | 20216 |
|  Inset profile for concrete surfaces Hawa Adapto 80, without fixed glass, 4000 mm (13' 1 15/32") | 20217 |

**Set consisting of:**

|  | mm (inch)            | 20216 | 20217 | No.   |
|--|----------------------|-------|-------|-------|
|  Inset profile for concrete surfaces, without fixed glass, aluminum   | 2,500 (8' 2 7/16")   | 1     |       | 20087 |
|  Polystyrene insert, without fixed glass                             | 1,000 (3' 3 3/8")    | 2     | 4     | 19418 |
|  Polystyrene insert, without fixed glass                            | 500 (1' 7 11/16")    | 1     |       | 19556 |
|  Assembly clips, plastic, black, without fixed glass                |                      | 4     | 5     | 19344 |
|  Cover cap, without fixed glass, plastic, gray                      |                      | 2     | 2     | 19366 |
|  Inset profile for concrete surfaces, without fixed glass, aluminum | 4,000 (13' 1 15/32") |       | 1     | 20088 |

**Hawa Adapto 80 concrete casting system, with fixed glazing**

|  | No.   |
|--|-------|
| Inset profile for concrete surfaces Hawa Adapto 80, with fixed glass, 2500 mm (8' 2 7/16")   | 20220 |
| Inset profile for concrete surfaces Hawa Adapto 80, with fixed glass, 4000 mm (13' 1 15/32") | 20221 |

| Set consisting of:  |   | mm<br>(inch)            | 20220 | 20221 | No.   |
|---|---|-------------------------|-------|-------|-------|
|    | Inset profile for concrete surfaces, with fixed glass, aluminum | 2,500<br>(8' 2 7/16")   | 1     |       | 20094 |
|    | Polystyrene insert, 1000 mm (3' 3 1/4"), with fixed glass       | 1,000<br>(3' 3 3/8 ")   | 2     | 4     | 19555 |
|  | Polystyrene insert, with fixed glass                            | 500<br>(1' 7 11/16")    | 1     |       | 19557 |
|  | Assembly clips, plastic black, with fixed glass                 |                         | 4     | 5     | 19568 |
|  | Cover cap, fixed glass, plastic, gray                           |                         | 2     | 2     | 19968 |
|  | Inset profile for concrete surfaces, with fixed glass, aluminum | 4,000<br>(13' 1 15/32") |       | 1     | 20095 |

**Assembly set for Hawa Adapto 80**

|   | No.   |
|---|-------|
|  Assembly set, with countersunk head screw, length up to 2500 mm (8' 2 7/16")(8' 2 7/16")                                | 22841 |
|  Assembly set, with countersunk head screw, length 2501-4000 mm (8' 2 15/32" to 13' 1 15/32") | 22842 |

| Set consisting of:  |  | 22841 | 22842 | No.   |
|---|--|-------|-------|-------|
|                                      | Distance plate, plastic, 1 mm (1/32")                              | 2     | 2     | 19398 |
|                                      | Distance plate, plastic, 2 mm (3/32")                              | 2     | 2     | 19399 |
|                                    | Distance plate, plastic, 3 mm (1/8")                               | 2     | 2     | 19400 |
|                                    | Distance plate, plastic, 5 mm (3/16")                              | 4     | 4     | 19401 |
|  | Countersunk screws special, 6x20 mm ((1/4" x 25/32"), 10-piece set | 1     | 2     | 22844 |

**Base/wall profiles and rubber profiles for fixed glazing**

|   |   | mm<br>(inch)             | No.   |
|---|---|--------------------------|-------|
|    | Bottom-/wall profile to fixed glass, aluminum, anodized, pre-drilled                      | 4,000<br>(13' 1 15/32")  | 19549 |
|   |   | 6,000<br>(19' 8 7/32")   | 19561 |
|   |   | cut to size              | 20067 |
|   | Bottom-/wall profile to fixed glass, aluminum, stainless steel look, brushed, pre-drilled | 4,000<br>(13' 1 15/32")  | 21285 |
|   |   | 6,000<br>(19' 8 7/32")   | 21286 |
|   |   | cut to size              | 21287 |
|    | Rubber profile, black, to fixed glass 8–9.9 mm (5/16" to 13/32")                          | 10,000<br>(32' 9 11/16") | 25787 |
|   | Rubber profile, black, to fixed glass 10–12 mm (13/32" to 15/32")                         | 10,000<br>(32' 9 11/16") | 25789 |
|  | Rubber profile, black, to fixed glass 12.1–13.1 mm (15/32" to 1/2")                       | 10,000<br>(32' 9 11/16") | 25763 |

**Wall connection**

|   |   | mm<br>(inch)            | No.   |
|---|---|-------------------------|-------|
|  | Wall profile, aluminum, anodized                      | 2,500<br>(8' 2 7/16")   | 17020 |
|   |   | 3,500<br>(11' 5 25/32") | 17021 |
|   | Wall profile, aluminum, stainless steel look, brushed | 2,500<br>(8' 2 7/16")   | 20119 |
|   |   | 3,500<br>(11' 5 25/32") | 20120 |
|  | Seal profile, black, for wall profile                 | 2,500<br>(8' 2 7/16")   | 16452 |
|   |   | 3,500<br>(11' 5 25/32") | 16453 |

**Protective edge trims**


|   |   | mm<br>(inch)             | No.   |
|---|---|--------------------------|-------|
|  | Rubber profile self-adhesive, black, for 8–12.7 mm (5/16" to 1/2") glass thickness, glass distance 4 mm (5/32")       | 5,000<br>(16' 4 27/32")  | 19442 |
|   |   | 10,000<br>(32' 9 11/16") | 19443 |
|   |   | 50,000<br>(164' 1/2")    | 19444 |
|   | Rubber profile self-adhesive, translucent, for 8–12.7 mm (5/16" to 1/2") glass thickness, glass distance 4 mm (5/32") | 5,000<br>(16' 4 27/32")  | 19445 |
|   |   | 10,000<br>(32' 9 11/16") | 19446 |
|   |   | 50,000<br>(164' 1/2")    | 19447 |

**Accessories**

|   |  | No.   |
|---|--|-------|
|   | SoftStop Hawa Junior 80/100, with adjustable retention spring          | 27771 |
|  | Bottom door stopper, with centering, stainless steel look              | 21473 |
|  | Bottom door stopper, with centering, chrome-plated, matt               | 20773 |
|  | Centering assembly grey, for all glass sliding doors                   | 18619 |
|  | Centering assembly black, for all glass sliding doors, to wall profile | 18663 |


**Angled profile for wall mounting**

The intelligent wall mounting with the angled profile for Hawa Junior running tracks for a door weight of up to 100 kg (220 lbs.).




**Wall connection**

Optimal wall connection for all-glass sliding doors with unprotected glass edge.

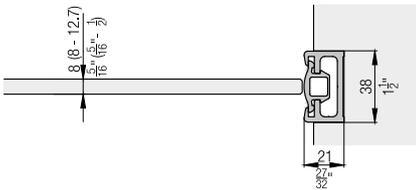


**Hawa Adapto 80 concrete casting system**

The Hawa Adapto 80 concrete casting system can be easily and efficiently integrated into the building shell and allows Hawa Junior 80 running tracks to be installed flush with the ceiling.

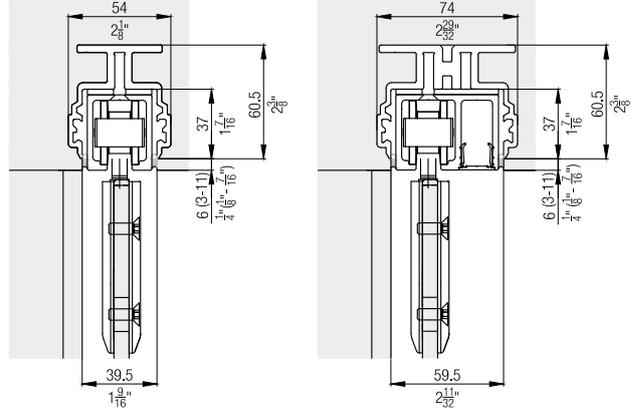


**Rubber profile for glass edge protection**

The self-adhesive rubber profile, mounted on the glass edge, reduces drafts to a minimum and protects the glass edge from collisions of the all-glass sliding doors.

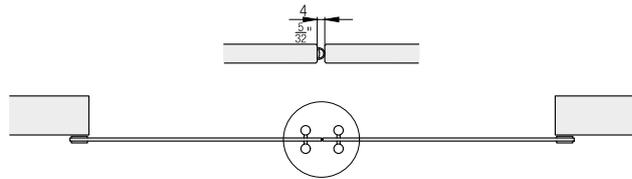

**SoftMove 100 magnetic soft closing mechanism**

Completely integrated into the running track, the SoftMove decelerates sliding doors and draws them into their final position.

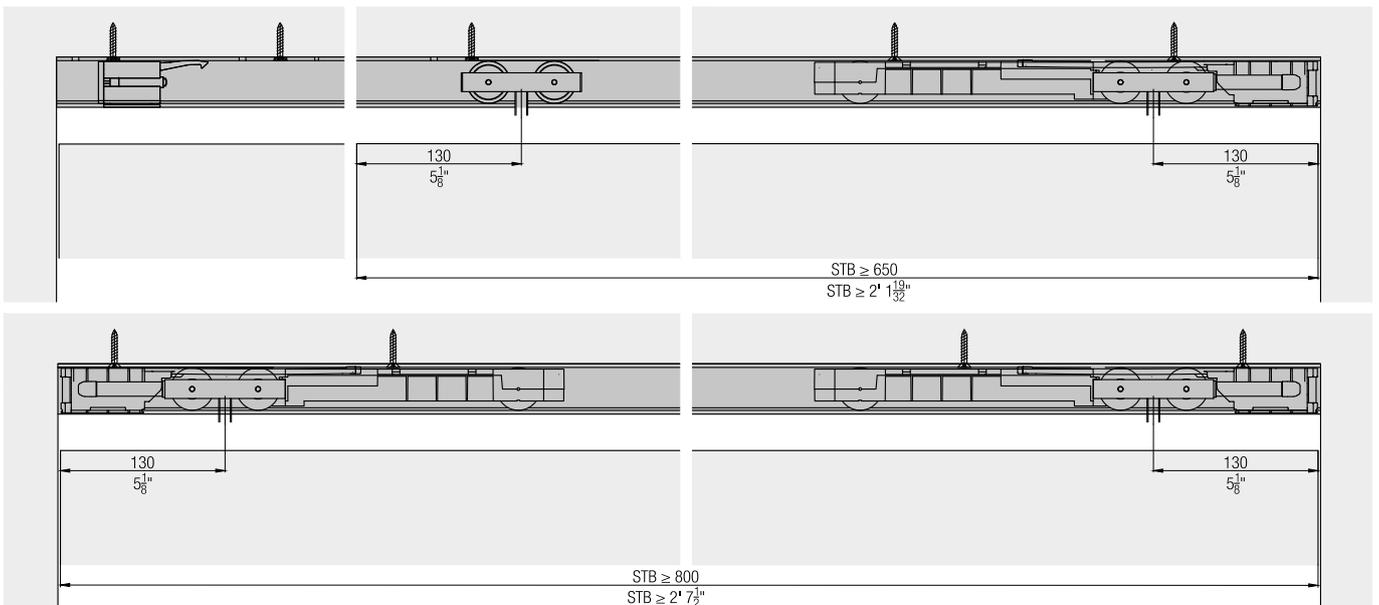

**Accessories**

- Lock solutions from page 511
- General accessories from page 518
- Glass recommendations from page 536

**Planning/execution**

Further information about the product can be found on [www.hawa.com](http://www.hawa.com).